



Contents

- Section 1** Safety working at height.
- Section 2** Hi-Step package contents & parts identification.
- Section 3** Assembly.
- Section 4** Operation.
- Section 5** Maintenance.
- Section 6** Extender package contents & parts identification.
- Section 7** Extender assembly.
- Section 8** Trolley fitting.

Section 1


Safety working at height

Work at height carries with it the risk of serious injury or death. The Henchman Hi-Step is designed to optimize safety and stability in operations working at height where there is not necessarily a level, flat or hard surface. Like any height access equipment, careful attention should be paid to use the Hi-Step properly, with good sense and only as advised by the manufacturer so as to minimize the inherent risks involved.

1. Before climbing, always:
 - Consider the risks of the job in hand and choose the most suitable equipment for safely tackling that job. Can the job be done from ground level?!
 - Read the user manual – if necessary as a reminder.
 - Read the safety warning label on the unit – if necessary as a reminder.
 - Check the unit for any signs of excessive wear or damage. Do not use if damage suspected.
 - Ensure that each extending leg is secured with an R clip.
 - Ensure that all bracing bars are secured at both ends by nuts and are locked straight.
 - Check that all 4 feet are in full contact with the ground and platform is stable.
 - Step back to check platform is level.
2. Only use replacement parts from Henchman Ltd when required. If parts have become damaged, do not try to bend them into shape and do not use makeshift parts for replacements.
3. When setting the Hi-Step on sloping or uneven ground, firstly adjust the extending legs to keep the platform level and stable; then screw each of the feet in or out so that they are in complete contact with the ground surface. Not more than (40mm) or 1.5” of thread should be showing. If more adjustment is necessary, slide the leg itself to the next pin hole.
4. Never mount the Hi-Step unless it is fully assembled.
5. Do not allow children on the Hi-Step – nor give them the opportunity to climb up. If necessary, store the Hi-Step in the folded position.
6. Never more than one person at a time on the Hi-Step. Not more than 150kg of combined operator and tooling weight on the platform.
7. Do not in any way modify the Henchman yourself. The Hi-Step range is tightly engineered to meet safety and stability requirements. “Foreign” parts may endanger the integrity of the product.

Section 2

Hi-Step contents & parts identification

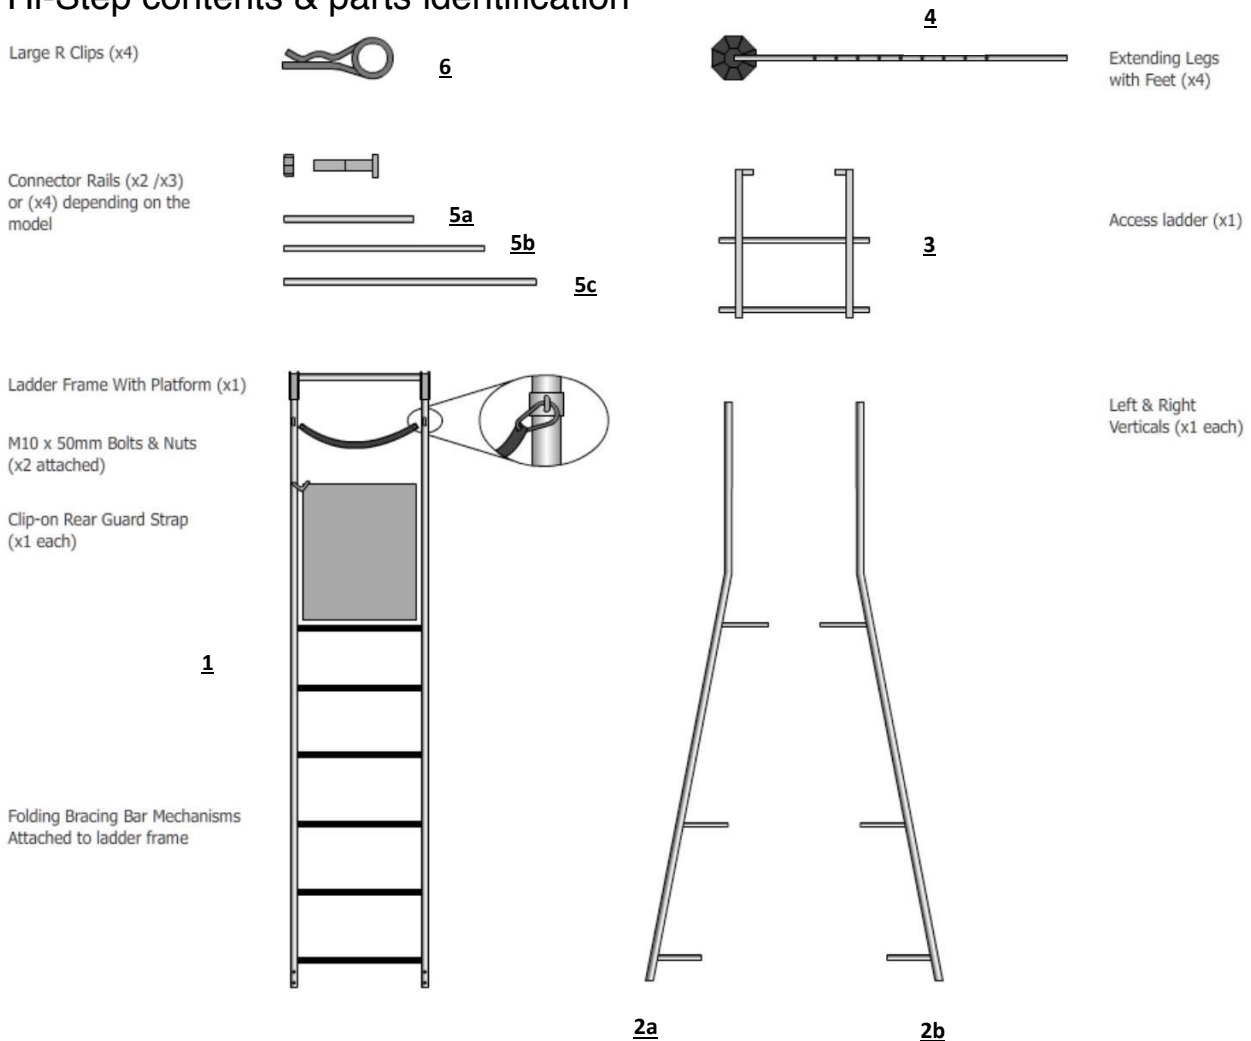

Section 3

Assembly of the Hi-Step


Tools required - Two 17mm spanners, one 13mm spanner.

1. Unpack and identify all contents. See 'Section 2 - Box Contents & Parts Identification'
2. Slide the connector rails (part no. 5a,5b & 5c) onto the stubs on the right hand long vertical (2b) - according to the colour coding on the rails and down the long verticals. They click over the popping buttons on the stubs.
3. Attach left hand long vertical (2a) to the other end of the connector rails. All 'buttons' should be cleanly popped into the holes on the rails. This now makes up the wider 'hedge side' frame.
4. Remove nuts and bolts from top of the ladder frame (part no.1). Locate the hedge side frame into the corresponding colour coded brackets at the top of the ladder frame. The wide base of the hedge-side frame should point upwards with the lugs on the inside, so that all lugs on both frames are pointing towards each other. Re-insert the bolts


through the holes of BOTH frames and fasten with self-locking nuts (do not over tighten or squash the metal).

5. Push each of the four adjustable legs (part no.4) into the tubular ends of the base of each frame, and fasten with large R clips (part no.6). All legs should be set to the same hole.
6. Carefully stand the unit up and open the frames (the unit is NOT fit for climbing yet). Lower the platform deck to the horizontal and locate the lugs on the underside of the platform over the rung on the hedge side frame. Push down to locate.
7. **After** having located the platform, secure the loose end of each bracing bar to the lug opposite, using nut/washer provided. For Hi Steps Major and Maxi there are two additional single bracing bars, below the 'H' bracing bar, which fastens on each frame of the Hi-Step. Push the bracing bars down to straighten them and 'lock' them out.
8. The small circular hoops to which the rear guard strap is fastened toward the top of the ladder frame should be removed, turned around so as to face outwards and re fastened with the same nut and bolt. Always ensure the rear guard strap is fastened both ends when operating from the Hi Step.
9. Platform lugs must be located over rung on hedge-side frame and bracing bars straightened and secured before use each time. Remove bracing bars only when folding the platform to move it or store it.
10. The removable 2 rung access ladder is required to climb onto the platform when the adjustable legs are extended beyond halfway. Place it on the appropriate rung as required for climbing up.

Final assembly for Hi-Steps Junior, Midi and Senior

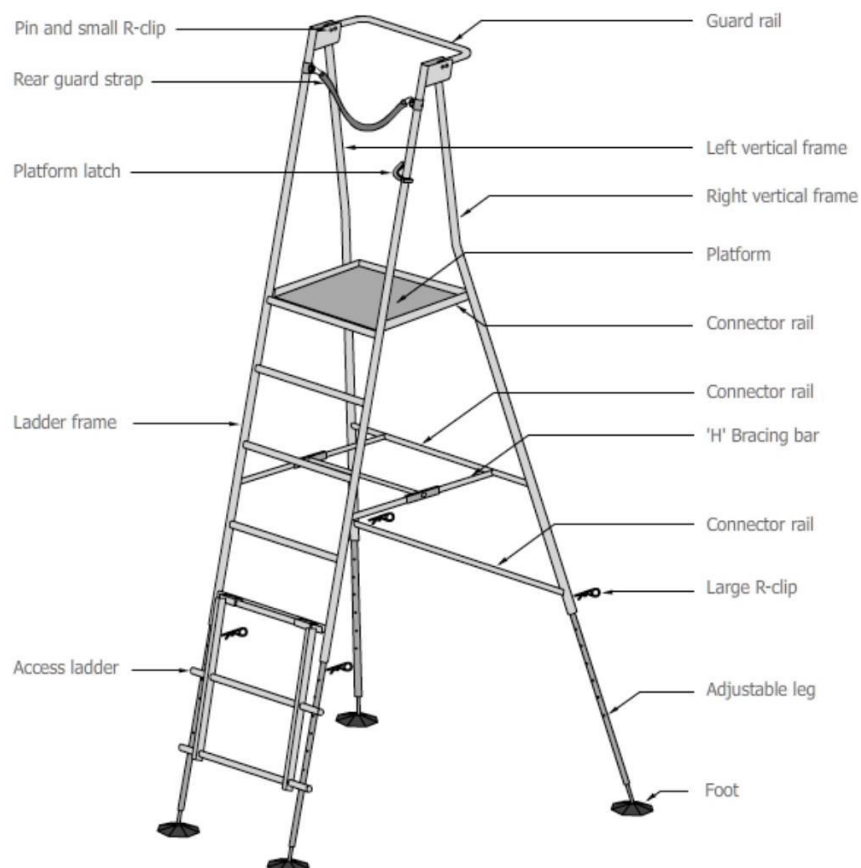

Final assembly for Hi-Steps Major and Maxi

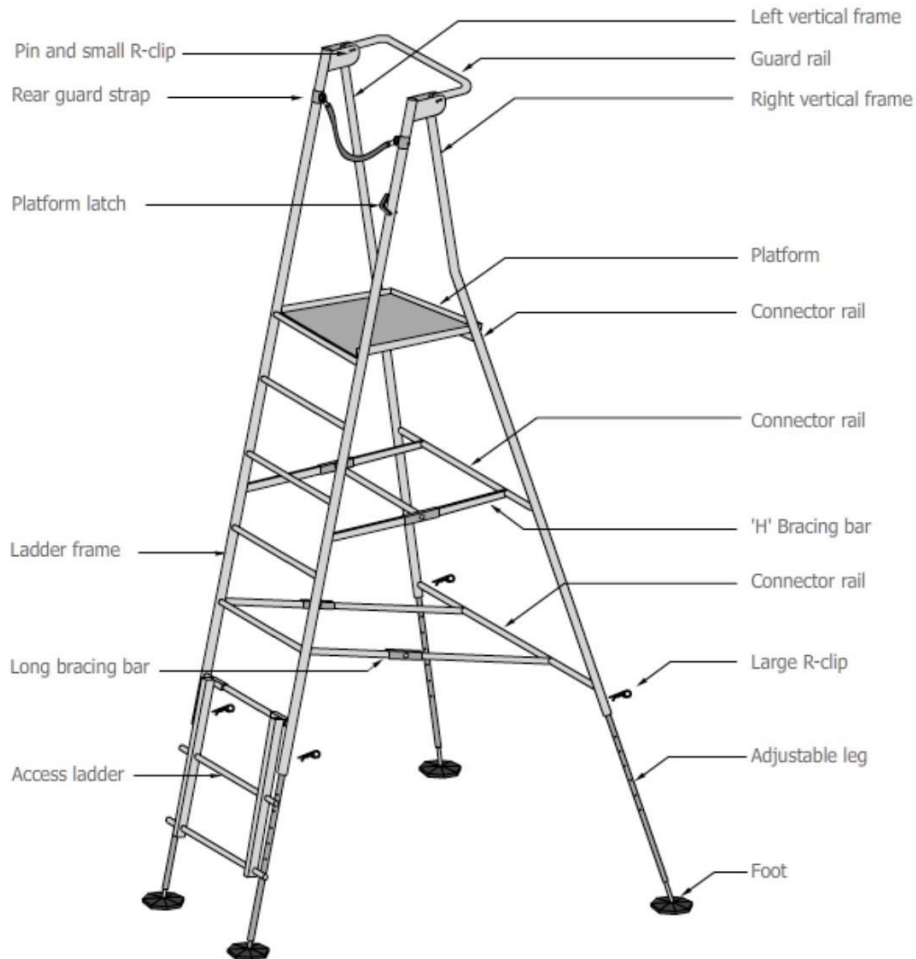

Section 4 Operation

The Hi-Steps are similar to a stepladder – but are designed, by use of the 4 adjustable extending legs and feet, to keep you level and stable, and therefore safe on sloping and uneven ground.

1. Each of the 4 legs adjusts by pulling out or pushing in and securing with a large R clip. There are 9 holes on the leg, and two on the main frame sleeve. Adjustments smaller than 75mm (or 3", the hole distance on the legs) can be made by using the alternate hole on the main frame (a 40mm or 1.5" adjustment). Final small adjustments are made by screwing the feet in or out. Don't screw the foot out more than 40mm or 1.5". These leg adjustments are made to keep the platform stable and level, and to alter the platform height.
2. Check all R clips are in place before climbing. Check platform is level and stable before mounting.
3. When the legs are fully extended, hook the 2 rung access ladder onto the most appropriate rung of the ladder frame – to provide easier access.

4. Moving the Hi-Steps is best done:

- Short distances - by "walking it" on the 2 front legs; see brochure/website.
- Longer distances - by folding it and carrying it, or by carrying it horizontally from inside, unfolded "like a pair of suitcases".
- Any distance - by using the trolley. See brochure/website.

5

. For storage like a step-ladder;

- Remove extender if fitted.
- Latch platform at vertical.
- Release bracing bars in their centers.
- Fold two frames together.
- Remove legs from mainframe (if leaving in, keep well lubricated).
- Stand up or hang on wall.


Section 5

Maintenance

1. The Hi-Step range products are tightly engineered in order to provide stability and safety. Be careful therefore not to dent or twist the aluminum out of shape. Seek replacements from Henchman Ltd if damage occurs.
2. Check the whole unit for any signs of damage before each use.
3. Do not try to force back into place or fix any damaged part. Seek advice or replacement part from Henchman Ltd only.
4. Keep the extending legs and all threads clean. Keep the legs and threads well lubricated to ensure smooth running up and down the sleeve, especially before storing for any length of time.
5. Store the Hi-Step products under cover in winter. Do not let the tubular sleeves fill with water and turn to ice which may crack the tubes.
6. Keep inner part of telescopic Extender bracing bars well lubricated, particularly when putting away for storage.

Section 6

Extender package contents & parts identification

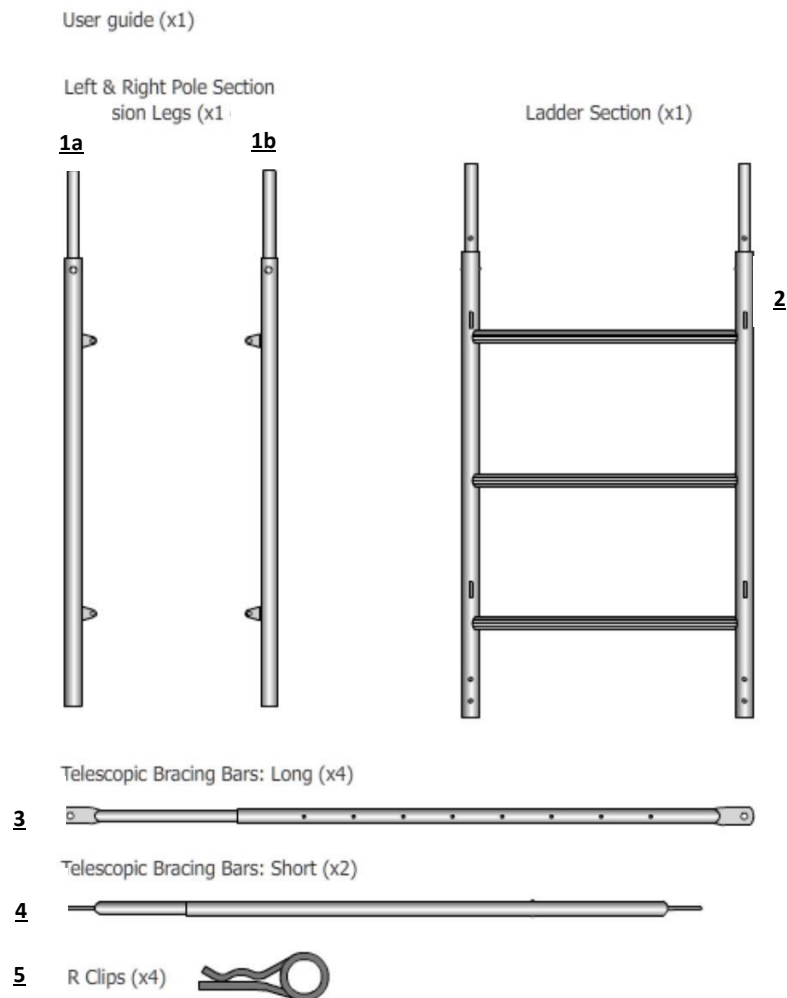


Section 7

Extender assembly

1. Lay the Hi-Step on its side on the ground and take out the legs (keep the bracing bars attached and locked straight).
2. Insert the 2 hedge side pole section extender legs (part 1a & 1b) with lugs pointing inwards and towards each other. Fasten with R clips (part 5). Do the same with the extender ladder section (part 2) with lugs pointing inwards. Secure with R clips.
3. Re-insert the 4 original adjustable legs (with 9 holes) into the new extender framework. Secure these legs with R clips near the halfway point, all at the same hole.
4. Attach both ends of the 6 adjustable telescopic bracing bars (parts 3 & 4) to the corresponding colour coded lugs on the extender framework. Two bracing bars cross each other on the left side of the unit, the right side and the hedge side. 4 bracing bars are identical (for the sides), 2 are shorter (for the hedge side). Secure one end of each with wing nuts and washers. When all are fitted, extend each one until button pops into the suitable hole for your model (as indicated on the product). To check fitted correctly the extender pole section should follow on in a straight line from the main frame. Carefully stand the Hi-Step upright.

Assembly for Hi-Step Extender

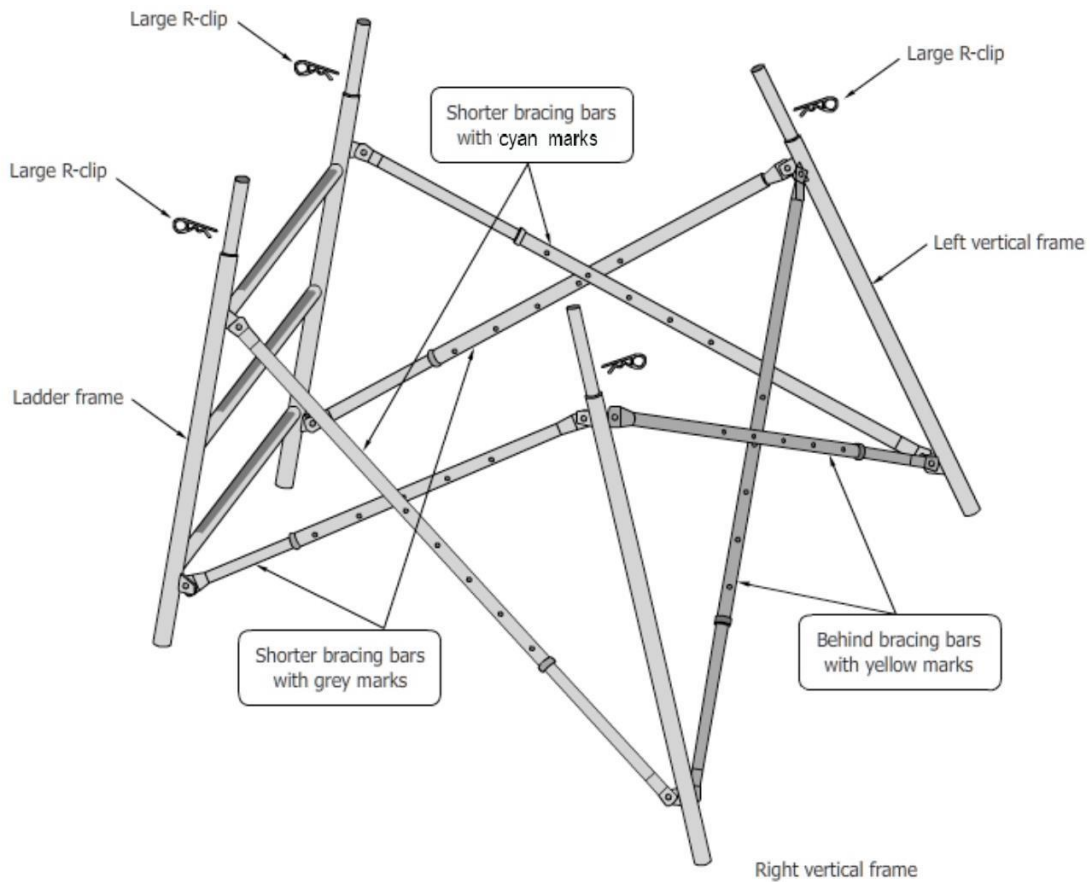

Section 8

Trolley fitting - The Trolley (wheels) fit on the Hi-Step with or without an Extender.

Step 1 - Your Trolley is ready for use without any assembly needed.

Step 2 - Put to one side the removable, two rungged ladder. Lift Trolley onto lower rung of the ladder – the vertical bar locates onto the second rung the ladder frame, and secure with pins and R clips.

Step 3 - The unit is now ready for transporting. Lean over on to wheels, to wheel to the next position.

www.henchman.co.uk

Henchman Ltd. Manor Farm, Hannington, Tadley, Hampshire, RG26 5TZ
Tel: 01635 299 847 Fax: 01635 299 024